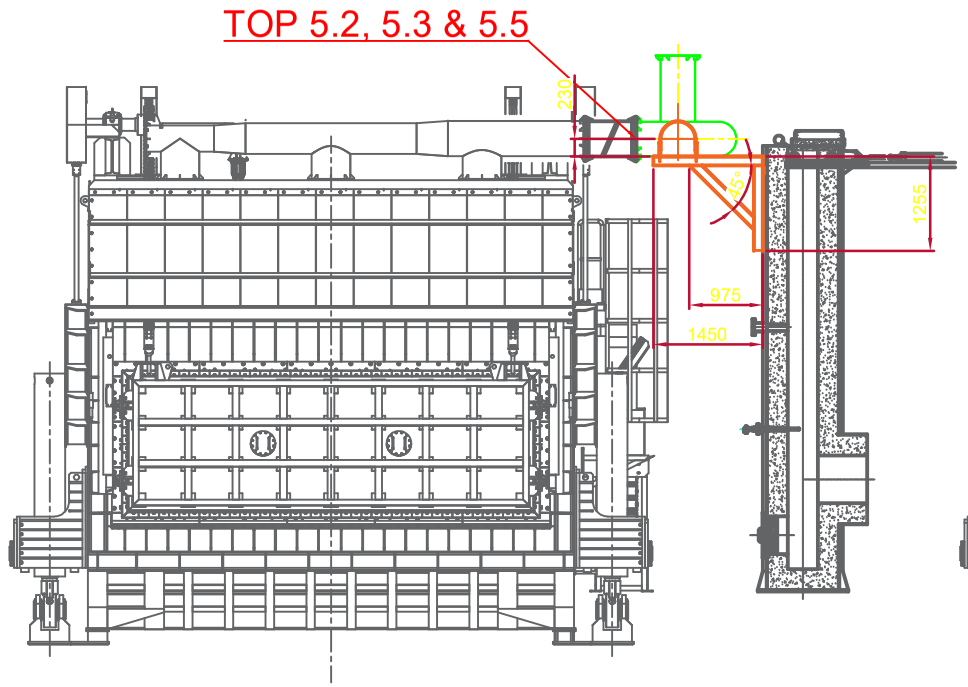

HOLDER 25 (CH-1, CH-2 & CH-4)
x3

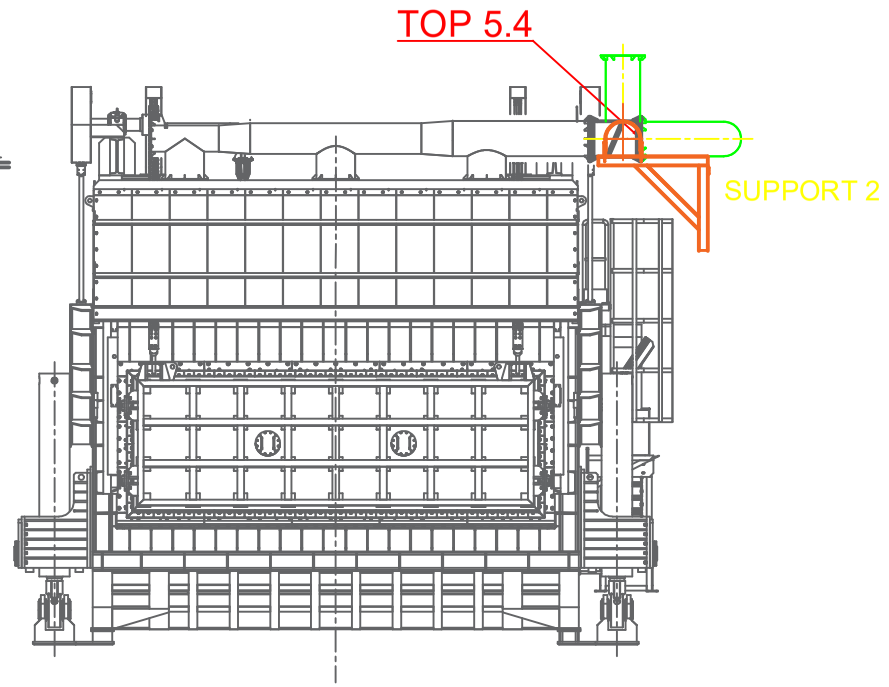

HOLDER 25 (CH-3)

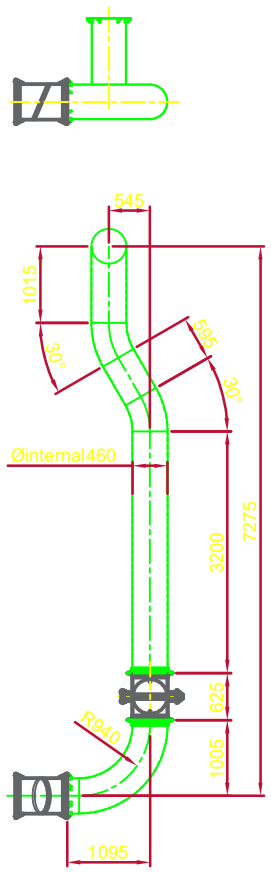

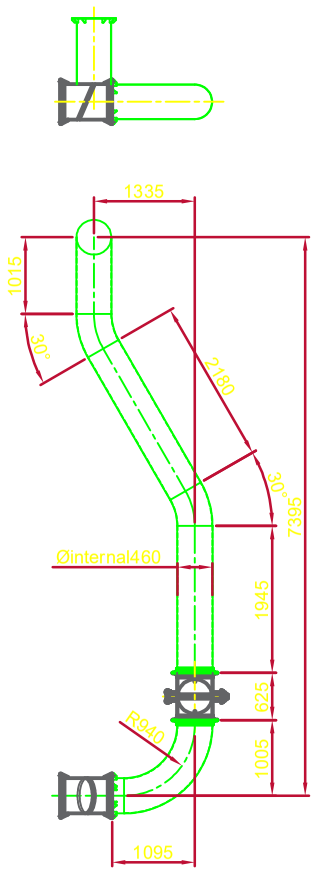

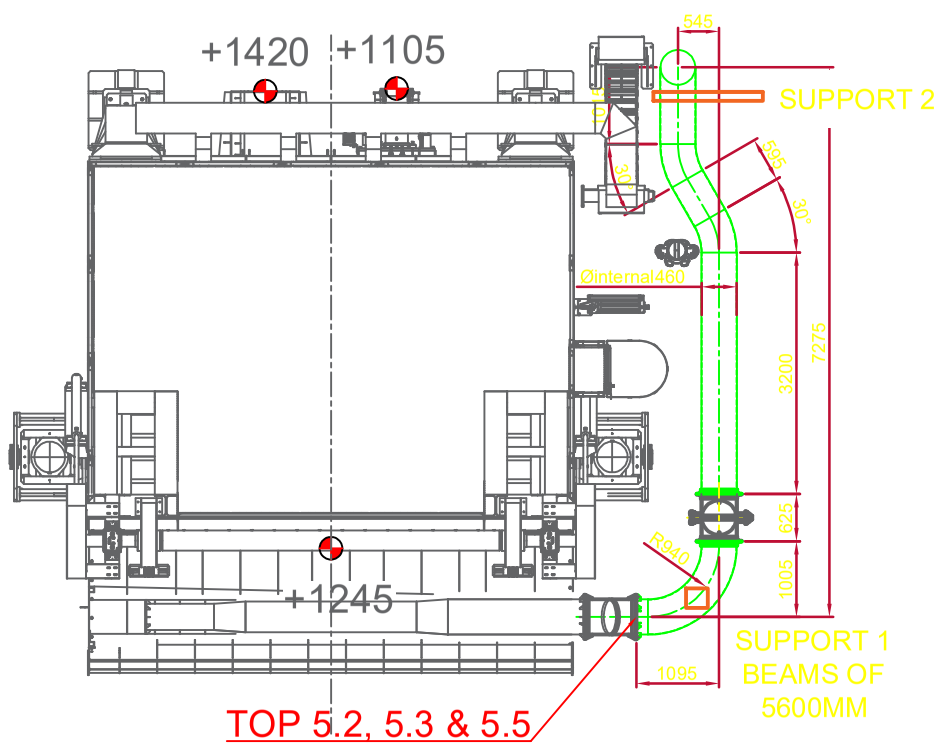

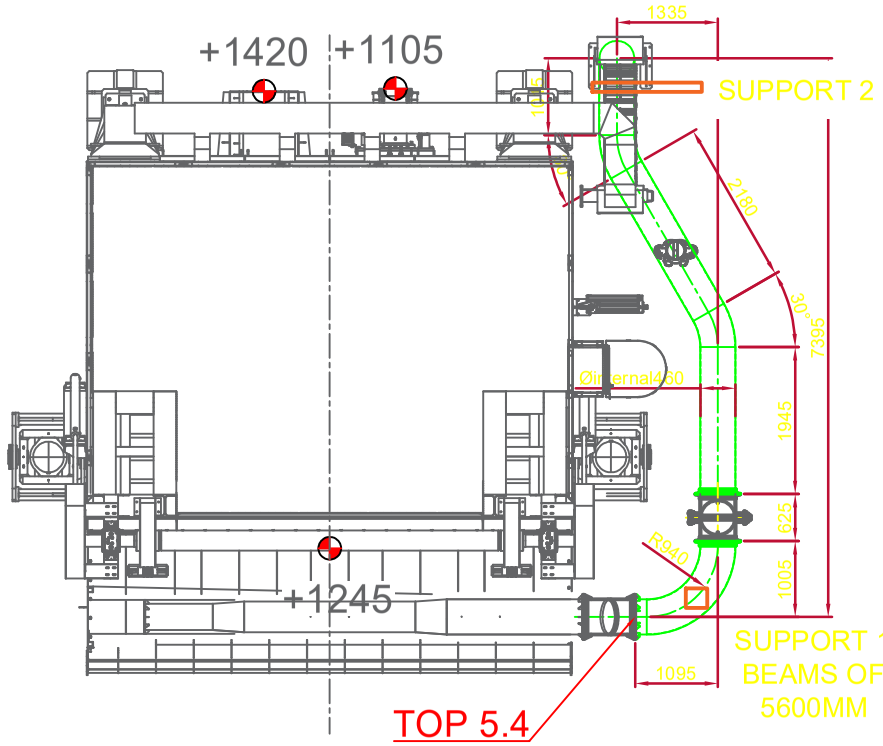

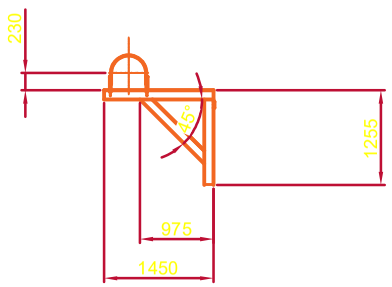

	X	Y	Z
TOP 5.2	1300454,04	552157,33	6516,22
TOP 5.3	1325454,04	552157,33	6516,22
TOP 5.4	1350454,04	552157,33	6516,22
TOP 5.5	1374454,04	552157,33	6516,22

MATERIAL FOR DUCTS: Stainless steel 1.4301
THICKNESS: 4 mm.

DODÁVKA UCHAZEČE
DODÁVKA UCHAZEČE
SCOPE IFI

Rev.	Modification	Date	Name
C	ADDED SUPPORT	16/07/25	J.I.S.

This drawing is property of INSERTEC. It can be only shared for the purposes of repair, modification, or component replacement provided that the third party is under a confidentiality agreement with CORALIUM. In other cases, it must not be copied or transferred to third parties in any way without written authorization.

Tolerances for dimensions without tol. according to ISO 2768–mK

More than	0,5	3	6	30	120	400	1000	2000
Less	3	6	30	120	400	1000	2000	4000
MachineTool	±0,1	±0,1	±0,2	±0,3	±0,5	±0,8	±1,2	±2
Welded		±0,5	±1	±1,5	±2	±3	±4	±6

	Date	Name
Drawn		
Checked		
Verified		

Material
Weight (Kg)

Customer: ALINVEST
Format: A1
Scale: 1:50
Proj. Methode

Title: E2558 DUCTS FOR LICITATION
Part Number: 2558-3321-THD-M-EXH-0000
Revision: C
Customer Number
Sheet: 1 of 1

insertec Furnaces & Refractories